

SERIE 160

Heatsealer by conduction TME 160



PHOTO NON CONTRACTUELLE

The pneumatic heatsealer **TME 160** is the much-awaited successor of the TME 150 which knows an unfailing success among years.

Experience acquired on the previous generation of heatsealers allowed us to design an even more reliable machine from a technical point of view while simplifying its use.

The operator places the lid on the jar and then makes the machine works either by pressing on the bi-manual controller or pushing the tray in the machine.

Adjustments and tooling changes are very quick and easy. Sealing parameters (time, pressure and temperature) are displayed, easy to modify on the touch screen and perfectly controlled by the heatsealer.

This compact machine is particularly suitable for small-scaled production and laboratory tests. The fact that the machine controls the 3 main parameters of sealing ensures the reproducibility of the operations.


Specifications :

Size : 430 x 600 x 920 mm
Weight : 70 kg
Standard size of the sealing pieces : 100x100 mm
Power : 300 W
Voltage : 220 V monophasé
Packagings size :
Diameter : <150 mm
Height (standard): <350 mm
Others : specific design on request.

Options :

- specific tooling (sealing piece with special shapes, silicon-coated pieces, jars supports...)
- complementary features (tray, bimanual controller...)
- inox version.

Need for compressed air supply.

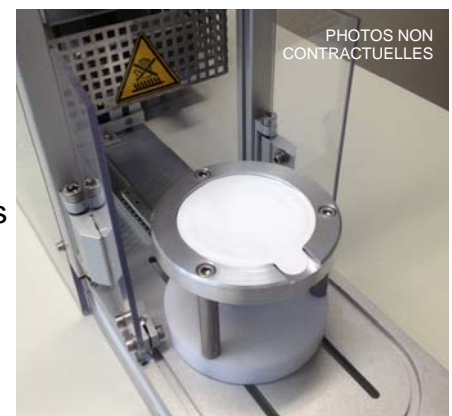

PHOTOS NON CONTRACTUELLES